


ULTRA-WIDE HYBRID
UV PRINTERS

DLI-5300



Application industry

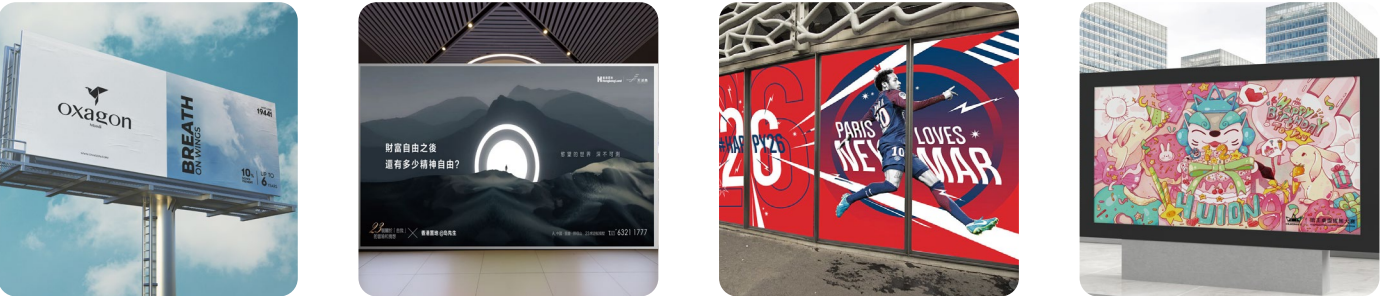

DLI-5300 is widely used in advertising, light box soft film, decorative building materials and other industries.

Technical Parameters			
Mode of Equipment	DLI-5300	Image reception format	PDF、TIFF(RGB&CMYK)、BMP、EPS、JPEG
Image resolution	Up to 1440dpi	Power supply	AC220V(+10%);50hz;P:10000W
Standard color	C、M、Y、K	Device dimensions	8100mmx2000mmx1950mm
Available in colors	IC、LM、LY、LK、O、W、V	Device weight	6800kg
UV curing technology	LED-UV curing technology.		
RIP software system	Printfactory, Caldera, Onyx, and many other printing software		
Printing system	Flat-roll dual- purpose UV printing equipment with DLICAN printing technology		

Media specifications		Production capacity	
Maximum print width	5300mm	Draft mode(2 pass)	460 sqm/hr
Maximum web width	5350mm	High -speed mode (4pass)	236 sqm/h
Maximum panel width	5200mm	Production Mode (6pass)	156 sqm/h
Maximum media thickness	50mm	Quality Mode(8pass)	138 sqm/h

The DLI-5300 is a 5.3m UV flat-roll industrial mesh belt printer serving the large-format printing market.

5.3 meters ultra-wideprinting format (Single or multiple rolls can be printed)	Up to six rows of 6 colors can be installed (Install up to 24 printheads)	The resolution is up to 1440 dpi	Fastest print speed 460 sqm/h
---	--	----------------------------------	-------------------------------

ULTRA-WIDE HYBRID
UV PRINTERS

DLI-6600



Application industry



DLI-6600 hybrid is widely used in advertising, light box soft film, decorative building materials and other industries.

Technical Parameters			
Mode of Equipment	DLI-6600 hybrid	Printing system	Dlican developed hybrid UV printer
Dpi-Resolution	up to 1440dpi	standard colors	C、M、Y、K
Optional colors	Ic、Im、Iy、Ik、R、G、B、O、W、V	Curing method	UV-Led curing system
File format	PDF、TIFF(RGB&CMYK)、BMP、EPS、JPEG	RIP Software	printfactory、Caldera、Onyx、etc.
Power requirements	AC220V(±10%); 50HZ;P:10000W	Printer Dimension	9670mm*2150mm*1900mm
Printer Weight	8500KG		

Media thickness		Print speed	
Maximum print width	6600mm	Draft mode(2 pass)	630m ² /h
Maximum panel width	6600mm	Speed mode (4 pass)	330m ² /h
Maximum roll media width	6650mm	Product mode(6 pass)	230m ² /h
Maximum media thickness	50mm	Quality mode(8 pass)	170m ² /h

DLI-6600 hybrid is widely used in advertising, light box soft film, decorative building materials and other industries.

6.6m ultra-wide printing format (Can print single roll, double roll, or multiple rolls)	Can install up to 6 rows 48 print heads	1440dpi-Resolution up to 1440dpi	Printing speed up to 630sqm/h
--	---	----------------------------------	-------------------------------



ULTRA-WIDE HYBRID
UV PRINTERS

DLI-1688



Application industry



Print cloth



signage



PVC



KT

Technical Parameters			
Mode of Equipment		DLI-1688	Operating System
Printing Color		CMYK+LCLM+W+V(customizable)	Microsoft Windows 10 Pro
Printing Height		0-50mm(customizable)	Power Requirment
Printing Size		Plate: 1640*2000mm; coil: 1640mm(max)	AC220V(±10%); 50HZ; P:8000W
Printhead Quantity		4-18(customizable)	Working Environment
Curing System		UV lamp curing	Temperature: 20°C-30°C; Humidity: 40-70%
Printhead		Konica 1024i; Ricoh Gen5; Ricoh Gen6; Ricoh Gen5S	Printer Dimension
Data Interface		High speed USB transfer interface/Gigabit network interface	4080mm*1600mm*1500mm
Lifting System		Automatic lifting of printhead/automatic monitoring of print height	Printer Weight
Ink System		Continuous ink supply/ink tank 2000ml/subtank constant temperature and pressure/white auto stirring	1500KG
RIP Software		Colorgate; Print factory; ONYX; Photo print; Reprint, etc.	File Format
			TIFF(RGB&CMYK); BMP; PDF; EPS; JPEG, etc.

Printing Speed (Konika 1024i 3 rows)		4PASS	6PASS	8PASS
Strong Feathering		109㎡	72m²/h	54m²/h
Middle Feathering		87㎡	58m²/h	43m²/h
Low Feathering		72㎡	48m²/h	36m²/h
Deep Feathering		58m²/h	41m²/h	32m²/h
Middle Feathering		48m²/h	36m²/h	29m²/h
Shalow Feathering		41m²/h	32m²/h	26m²/h

ULTRA-WIDE HYBRID
UV PRINTERS

DLI-3300



Application industry



Lamp-box fabric



stretch ceiling membrane



Advertising sticker



wood panel

Technical Parameters			
Mode of Equipment		DLI-3300	RIP Software
Printing Precision		2880DPI(max)	Printfactory; Caldera; Onyx, etc.
Standard Solution		CMYK	Power Requirment
Opsitonal Soluiton		LCLMLYLK; RGB; OWV	AC220V(±10%); 50HZ; P:10000W
Curing System		UV lamp curing	Printer Dimension
			5800mm*1615mm*1650mm
			Printer Weight
			2800KG
			File Format
			TIFF(RGB&CMYK); BMP; PDF; EPS; JPEG, etc.

Material Specification	
Max Printing Width	3250mm
Max Coil Width	3300mm
Max Plate Width	3200mm
Max Material thickness	50mm

Print speed	
2 Pass	400m²/h
4 Pass	220m²/h
6 Pass	150m²/h
8 Pass	120m²/h

ULTRA-WIDE HYBRID
UV PRINTERS

DLI-3300S



Application industry



Leather



wallpaper



PVC soft film



Advertising board

Technical Parameters			
Mode of Equipment		DLI-3300S	RIP Software
Printing Precision		2880DPI(max)	Printfactory; Caldera; Onyx, etc.
Standard Solution		CMYK	Power Requirment
Opsitonal Soluiton		LCLMLYLK; RGB; OWV	AC220V(±10%); 50HZ; P:10000W
Curing System		UV lamp curing	Printer Dimension
			5800mm*1615mm*1900mm
			Printer Weight
			3100KG
			File Format
			TIFF(RGB&CMYK); BMP; PDF; EPS; JPEG, etc.

Material Specification	
Max Printing Width	3250mm
Max Coil Width	3300mm
Max Plate Width	3200mm
Max Material thickness	50mm

Print speed	
2 Pass	400m²/h
4 Pass	220m²/h
6 Pass	150m²/h
8 Pass	120m²/h