
Examples

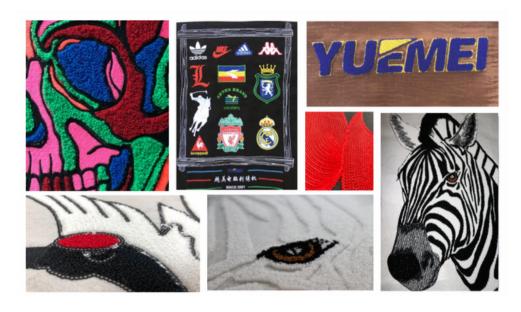

Optional Devices

- 1. Automatic shin changing device
- 2. Single/double sequin device
- 3. Cord strap device
- 4. Bead Device
- 5. Laser Pointer

Specifications

- 1.10 inch LCD
- 2. Linear Colour Change System
- 3. Dot Hopper Motor
- 4. X-Y Servo Motor
- 5. Thread Cutting Motor

Need	dles	Model	Heads	Distance to heads	Field Area X	Field Area Y	L mm	W mm	H mm
9/12	6/9	MIX-PTS	12	600	600	800	9850	2200	2050
9/12	6/9	MIX-PTS	15	600	600	800	11400	2200	2050
9/12	6/9	MIX-PTS	18	600	600	800	13800	2200	2050

The above models are typical market models. YUEMEI offers personalised customer service.



653159339



mariposa@coloresx.com





MIX - PTS SERIES

12612 MIXED CHENILLE MACHINE Embroidery Machine MIX HP & TS

The market demands more and more chenille machines, as well as the application of chenille embroidery in baby clothing.

YUEMEI launches the high-speed mixed machine on the market at the right time. The machines are more and more regularly and stably purchased more and more by the domestic market such as Shandong

Guangdong, Zhejiang etc. and abroad as well as in India, Turkey, Portugal, Pakistan receiving favorable evaluations from customers.

We are willing to create a new future with you...





MIX-PTS-A12612/600-600-800 TSM TH DHO MT C3 MJ LRPS DHO NL VF DTS





Characteristics

No.1: High speed embroidery creates high output

No.2: High quality embroidery with intense effects

No.3: Low noise in production creates better working environment

No.4: Save costs with reliability

No.5: Automatic change between normal embroidery, lockstitch and chainstitch

No.6: Designs with strong three-dimensional effect

Functionalities

Power supply: 380 V 50-60 Hz

Communication: USB

Memory: 2 million stitches, 200 patterns

Languages: Chinese, English

English, Turkish, Korean, French, Arabic, Spanish,

Russian, Portuguese

Russian, Portuguese, etc.

Work types: Normal embroidery,

3D embroidery, high thread / chain stitch (chenille)

sequin embroidery, bead embroidery, cording among other possibilities...

Specifications

Speed: Normal 1200 rpm / chenille 1000 rpm

Electronics and software: DAHAO

Operating system: System developed for YUEMEI

Monitor: 10 inch LCD

Servomotors

Shuttles: Hirose (Japanese)

New features:

Semi-automatic lubrication system.

Line brake.

Details











